


Ficha de instalação e manutenção

Janeiro'2022

GLOBALDIS
FOR YOU, TODAY
GRUPO VICAIMA



Bamboo Wall Cladding

Remark: the wall panels in the picture are only for reference, the exact color should be subject to the actual products.

Material & Tools



Wall Panel



Joist



Fastener



Stainless Screws



Electric Saw



Nail Of Pneumatic



Steel Tape



Spirit Level



Rubber Hammer



Electric Screw
Driver

Consideration

- 1 Before installing, please keep the products in dry and shade place, avoid the sunshine and the rain. Defects in surface caused by improper storage, is insufficient to cause customer complaint.
- 2 Before installation, clean up the wall, make sure it's flat and stable. If there is no solid masonry on the substrate, the joist must be fixed to the main body of the building in a solid frame and in accordance with the relevant building regulations and design requirements.
- 3 The distance between the joists must be between 400 to 500mm, by a wall cladding of 1860mm length need minimum 5 joists.
- 4 Make sure the wall and wall cladding keep dry before installation.

Dados técnicos apresentados de acordo com informação do fabricante. Todos os materiais comercializados pela Globaldis (GDS) devem ser instalados por um técnico competente e que cumpra as normas de instalação do respetivo produto. A garantia dos produtos da GDS fica sujeita ao cumprimento nas normas de instalação indicadas. A Globaldis procura melhorar constantemente a sua oferta, por esse motivo, reserva o direito de proceder a alterações, sem aviso prévio, na gama de produtos ou especificações técnicas.

Vale de Cambra
Rua da Vicaima
t. +351 256 426 400

Albufeira
Malhada Velha
t. +351 289 580 640

Perafita
Freixeiro (Antiga Jomar)
t. +351 229 069 040


geral@globaldis.pt
GLOBALDIS:PT

Contact Center 808 50 50 30

Ficha de instalação e manutenção



GLOBALDIS
FOR YOU, TODAY

GRUPO VICAIMA





Janeiro'2022

Two Installation Methods

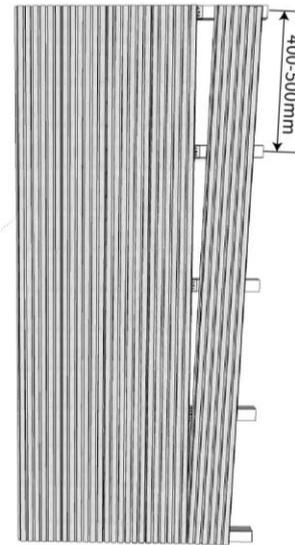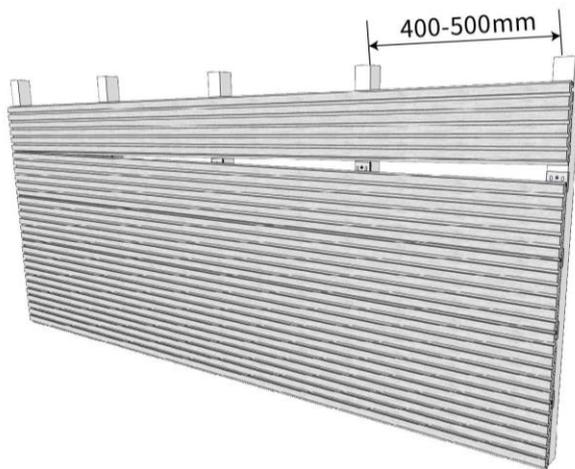

Installation

The wall panel can be installed both in horizontal and vertical direction. The correct order of horizontal installation should be bottom-up. First of all, please install the joists in the crisscross direction of the wall panels. Secondly, please pre-drill of the first wall panel and fix it to the joists by screws (or by gun nails), then embed the raised part of clips to the groove of the wall panel and lock with screws. (Notice: if REBO bamboo joists are used, please always pre-drill the holes to avoid cracking.)

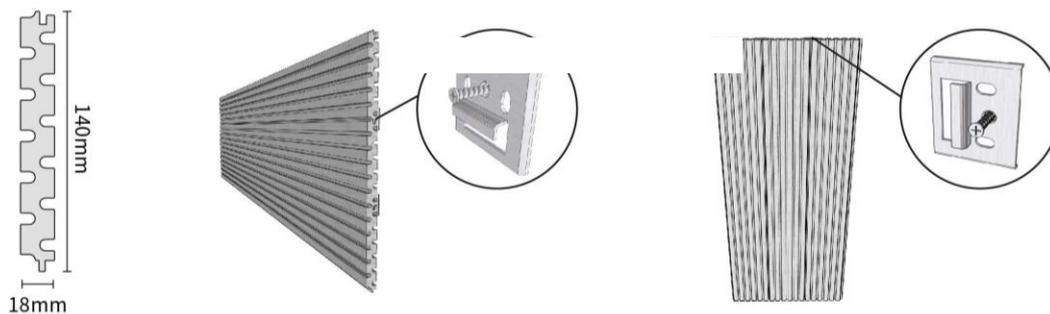

The distance of 1 mm on head side of board is recommended, in case of hygroexpansion.

Dados técnicos apresentados de acordo com informação do fabricante. Todos os materiais comercializados pela Globaldis (GDS) devem ser instalados por um técnico competente e que cumpra as normas de instalação do respetivo produto. A garantia dos produtos da GDS fica sujeita ao cumprimento nas normas de instalação indicadas.

A Globaldis procura melhorar constantemente a sua oferta, por esse motivo, reserva o direito de proceder a alterações, sem aviso prévio, na gama de produtos ou especificações técnicas.

Vale de Cambra
Rua da Vicaima
t. +351 256 426 400

Albufeira
Malhada Velha
t. +351 289 580 640

Perafita
Freixeiro (Antiga Jomar)
t. +351 229 069 040

geral@globaldis.pt
GLOBALDIS:PT

Contact Center 808 50 50 30

Ficha de instalação e manutenção

Janeiro'2022

GLOBALDIS
FOR YOU, TODAY
GRUPO VICAIMA



Bamboo Wall Cladding

First maintenance is required directly after installation, afterwards six months one time suggested. Apply outdoor water-based oil after cleaning up the surface.

Select suitable tool for cleaning according to the fixing scale.



❶

Clean the wall panels: wash it with water or use special cleaner to get rid of mucedine and dirt then clean it with brush.



❷

Make sure the wall panels get dry naturally and apply outdoor water-based oil.



❸

Protect the maintained area until oil gets dry naturally.



M-Series



After Installation 2 Years After Use After Cleaning After Maintenance

D-Series



After Installation 2 Years After Use After Cleaning After Maintenance

Dados técnicos apresentados de acordo com informação do fabricante. Todos os materiais comercializados pela Globaldis (GDS) devem ser instalados por um técnico competente e que cumpra as normas de instalação do respetivo produto. A garantia dos produtos da GDS fica sujeita ao cumprimento nas normas de instalação indicadas. A Globaldis procura melhorar constantemente a sua oferta, por esse motivo, reserva o direito de proceder a alterações, sem aviso prévio, na gama de produtos ou especificações técnicas.

Vale de Cambra
Rua da Vicaima
t. +351 256 426 400

Albufeira
Malhada Velha
t. +351 289 580 640

Perafita
Freixieiro (Antiga Jomar)
t. +351 229 069 040

geral@globaldis.pt
GLOBALDIS:PT

Contact Center 808 50 50 30